

# ANT Series

Innovative, High quality, Best price



## ANT-HP5529N

Dual Polarity High Performance Dish  
4.8 - 6.1 GHz, 29 dBi

### Features:

- Wide Band Operation
- Vertically and Horizontally Polarized
- Best Solution for **Noisy** Environments

### Electrical Specification


Frequency Range:	4800 - 6100 MHz
Gain:	29 dBi
3dB Beamwidth:	4.0°(typ)
VSWR:	1.4:1(typ)
Impedance:	50 Ohms
Input Power:	25 W
Connector:	2 x N-Female
Sidelobes:	ETSI EN 302.326-3 DN1-DN5
Front to Back Ratio:	-40 dB
Cross Polarization:	-28 dB (max), -32 (typ)
Port to Port Isolation:	-32 dB (max), -45 (typ)

### Mechanical Specification


Size/Diameter:	680 mm
Weight(incl. bracket):	6.1 Kg
Wind Loading(Operating):	130 Km/h
Wind Loading(Survival):	190 Km/h
Operating Temperature:	-50°C to 70°C
Mounting Kit/Style:	Included/Pole Mount
Pole Diameter:	25-60 mm
Additional Features:	Accurate Pan & Tilt alignment




5.5 Ghz E-Plane and H of E-plane




5.5 Ghz H-Plane and E of H-plane




Antenna Gain 4800-6100 MHz

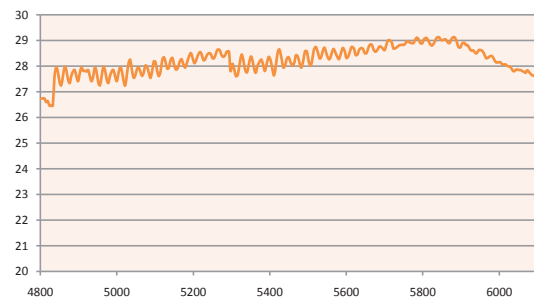

Antenna Cross Polarity 4800-6100 MHz

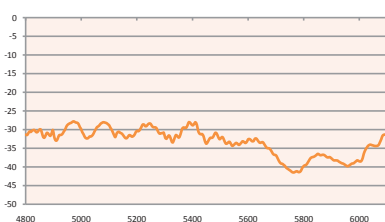

Antenna Port to Port Isolation 4800-6100 MHz

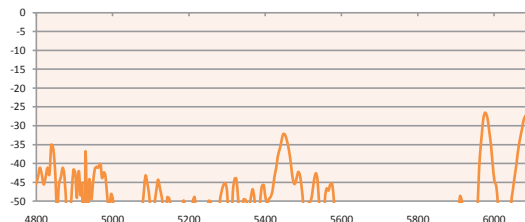

Antenna VSWR 4800-6100 MHz

